



Installation Instructions
Diesel Performance Chip
Chevrolet / GMC
1994-1995
C/K 1500, 2500, 3500
6.5 Turbo Diesel

1. Disconnect negative terminal from battery.
2. Remove glove compartment.
3. Slide computer towards the driver's side and disconnect both wiring harnesses and remove computer.
4. Remove access cover from computer using a ¼" nut driver or socket.(See Fig. 1)
5. Remove stock chip by pressing the tabs in and remove by pulling straight out.(See Fig. 3)
6. Install JET Performance Chip with "white dot" facing the same as Figure 6.
7. Reinstall computer and wiring harnesses.
8. Reconnect negative terminal
9. Start vehicle and verify vehicle runs normally and there are no warning lights illuminated.

For Technical Assistance
Call the JET TECH line
714-848-5515
Mon-Fri 8-5 PST

JET Performance Products
17491 Apex Circle
Huntington Beach, CA 92648

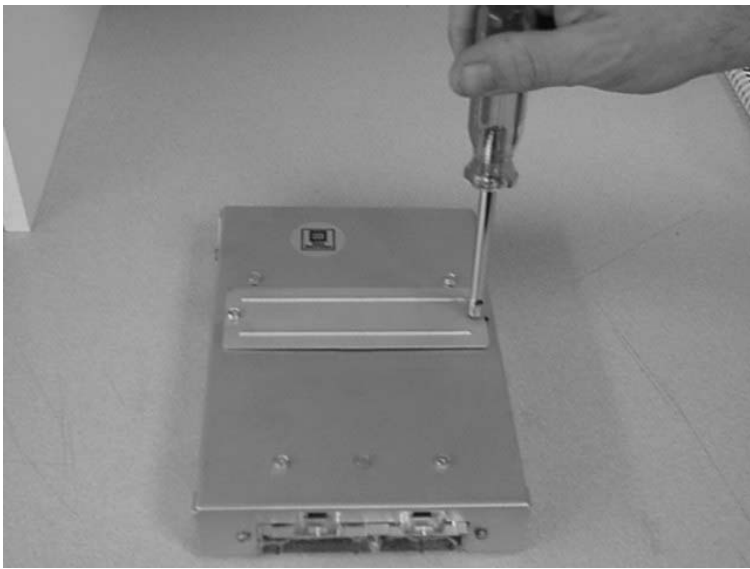


Figure 1

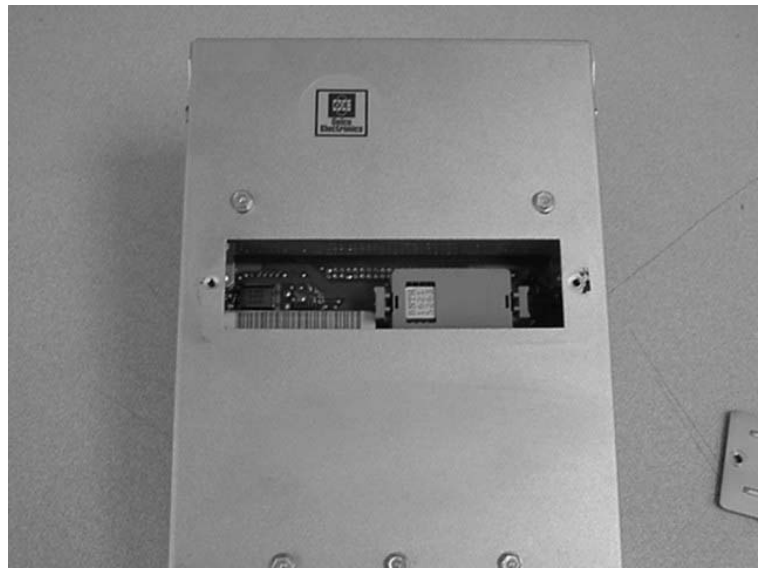


Figure 2

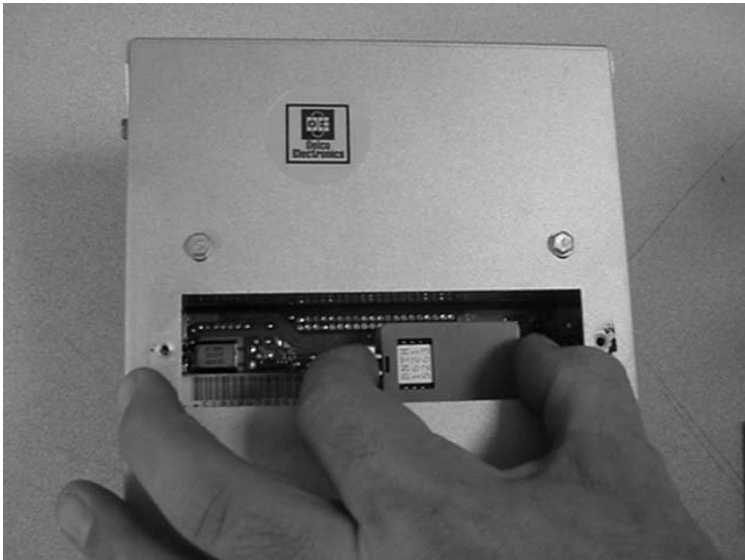


Figure 3

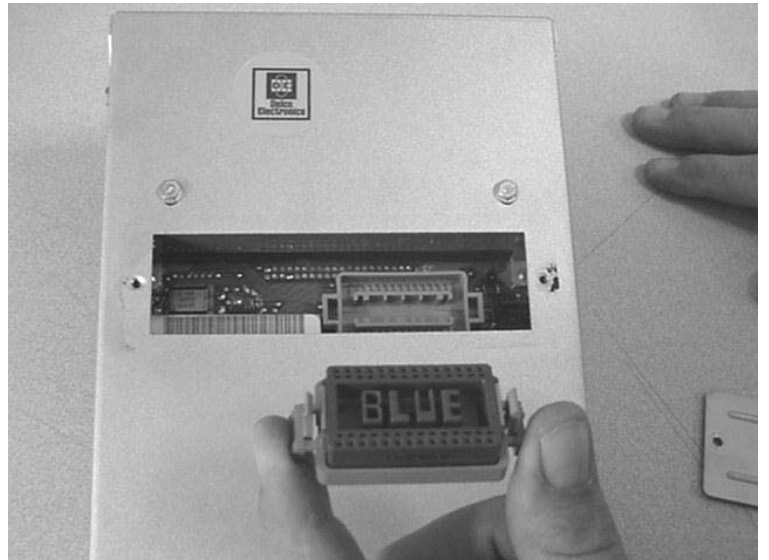


Figure 4



Figure 5

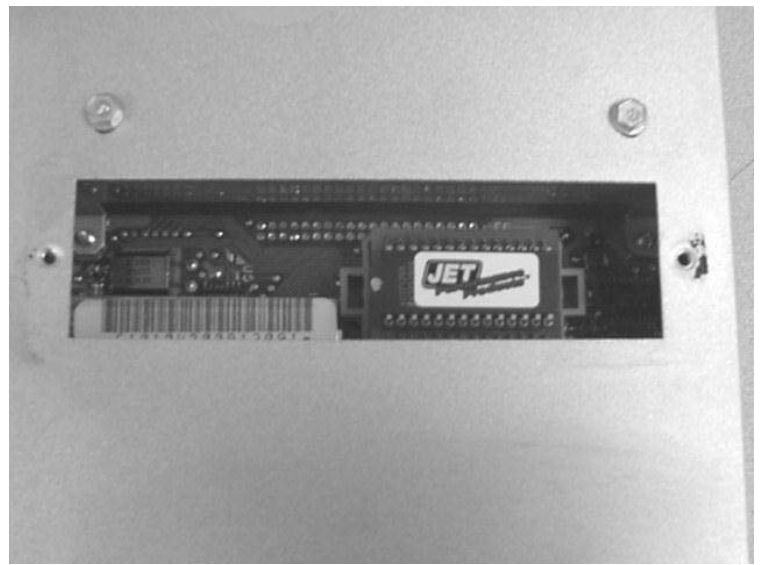


Figure 6