


INSTALLATION INSTRUCTIONS FOR CAGS SKIP SHIFT

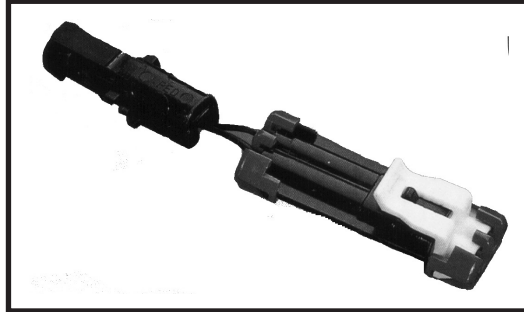

TECHNICAL ASSISTANCE 1-714-848-5515

Jet Performance Products 1993-2002 Camaro/Firebird CAGS Plug Seal Kit Model #61610

INTRODUCTION:

The CAGS (Computer Aided Gear Selection) is a built-in system that automatically upshifts from first gear to fourth gear at light throttle speeds between 15 and 20 m.p.h. The ratios for maximum performance acceleration are 1,2,3,4,5. Although for best part-throttle economy, with CAGS engaged, the ratio is 1,4,5,6. The JET Model #61610 CAGS Plug Seal Kit will disengage the "skip shift" feature and seal the skip shift solenoid/factory connector from contamination.


INSTALLATION PROCEDURES:

1. Disconnect the negative (black) battery cable from the battery.
2. Raise the vehicle using ONLY the proper procedures outlined in the factory GM Service Manual. To order a service manual for your vehicle, call Helm, Inc. at 1-800-782-4358. **THINK SAFETY FIRST!**

ALWAYS MAKE SURE THE VEHICLE IS PROPERLY SUPPORTED PRIOR TO WORKING UNDERNEATH IT.

3. Remove the Blue/White cap from the JET CAGS Skip Shift. Disconnect the factory wiring harness from the skip shift solenoid on the left rear (Driver's Side) of the transmission. Plug the blue/white cap into the skip shift solenoid on the transmission sealing the connection from the elements. Plug the factory harness into the JET CAGS Skip Shift. Secure the

4. Plug the factory harness into the JET CAGS Skip Shift. Secure the factory harness and skip shift with the supplied tie wrap to keep the harness and skip shift with the supplied tie wrap to keep the harness from dangling/dragging.
4. Lower vehicle following safety procedures and re-connect the negative battery cable.

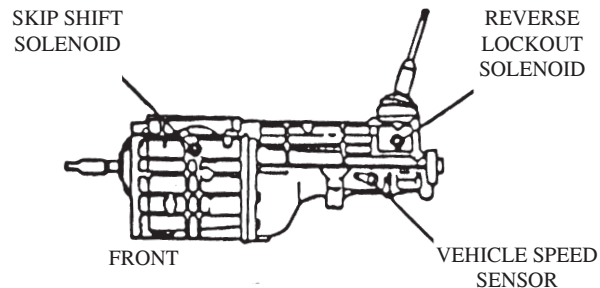

BORG-WARNER (T56) 6-SPEED MANUAL TRANSMISSION

GM, Camaro, Firebird are registered trademarks of the General Motors Corporation.
Rev. 696030

**93-04 Corvette #61010/#61615
 2009-Up Challenger #61615
 04 & Up CTSV #61618
 04 & Up GTO #61619
 10 & Up Camaro #61615
 10 & Up Challenger #61615**

Plug the factory harness into the JET CAGS Skip Shift. Secure the factory harness and skip shift with the supplied tie wrap to keep the harness from dangling/dragging.
 4. Lower vehicle following safety procedures and re-connect the negative battery cable.

INTRODUCTION:

The CAGS (Computer Aided Gear Selection) is a built-in system that automatically upshifts from first gear to fourth gear at light throttle speeds between 15 and 20 mph. The ratios for maximum performance acceleration are 1,2,3,4,5,6. Although for best part-throttle economy, with the CAGS engaged, the ratio is 1,4,5,6. The Jet Performance CAGS Skip Shift Eliminator will disengage the "skip-shift" feature and seal the solenoid/factory connector from contamination.

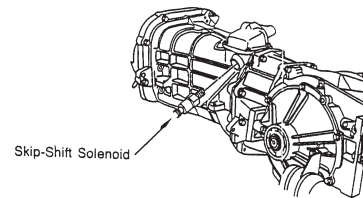


Diagram 1

INSTALLATION PROCEDURES:

1. Disconnect the negative (black) battery cable from the battery.
2. Raise the vehicle using ONLY the proper lift and safety procedures outlined in the GM Corvette Service Manual.
 To order service manual for your vehicle, call Helm, Inc. at 1-800-782-4358. THINK SAFETY FIRST! ALWAYS MAKE

SURE

THE VEHICLE IS PROPERLY SUPPORTED PRIOR TO WORKING UNDERNEATH IT.

3. Remove the Blue/White cap from the JET CAGS Skip Shift. Disconnect the factory wiring harness from the skip shift solenoid on the left rear (Driver's Side) of the transmission. Plug the blue/white cap into the skip shift solenoid on the transmission sealing the connection from the elements.

**IF YOU SHOULD ENCOUNTER A PROBLEM
 AFTER INSTALLATION, DO NOT CONTACT
 THE DISTRIBUTOR YOU PURCHASED IT FROM - CALL
 THE JET TECH LINE AT - 1-714-848-5515**

**ASK ABOUT OTHER JET PRODUCTS FOR
 YOUR CAR OR TRUCK**

- * PERFORMANCE CHIPS
- * PERFORMANCE MODULES
- * PERFORMANCE PROGRAMMERS
- * PERFORMANCE PULLEYS
- * JET 6-PAK CHIP
- * JET SHIFT COMMAND
- * JET MASS AIR FLOW SENSORS
- * JET TBI SPACERS
- * JET THROTTLE BODY

Limited Warranty

JET Performance Products warrants Chips and Modules to be free from defects in material and workmanship under normal use and if properly installed for a period of 2 years. This limited warranty is to the original purchaser on which the product was originally installed, provided all information requested is furnished. If found to be defective as mentioned above, it will be replaced or repaired at the sole discretion of JET if returned prepaid along with proof of date of purchase.

All other products and services performed by JET are warranted in defects in material and workmanship for a period of 6 months from date of purchase. This warranty is to the original purchaser for as long as he or she owns the vehicle on which the product was originally installed. Repair, Replacement, or Credit will be based on the date of purchase. Costs for labor are specifically excluded and are the sole responsibility of the purchaser.

This warranty does not apply to Custom Programming or any product incorrectly installed, modified by the purchaser, or to any product that has been subjected to misuse, negligence or accident.

To obtain warranty service and Return Authorization Number, contact our Customer Service Department at 714-848-5515 between 8 am and 5 pm Pacific Standard Time, Monday through Friday.

Defective Products may be brought or sent prepaid (with Return Number) to JET Performance Products, 17491 Apex Circle, Huntington Beach, CA 92647.

JET Performance Products
 17491 Apex Circle
 Huntington Beach, CA 92647
 Phone: (714) 848-5515 • Fax: (714) 847-6290